


**ANALOG UNBALANCED AUDIO SWITCH MODULES**

**FEATURES**

- High quality, low cost
- 8x8, 16x8, & 16x16 input/output
- RCA jacks for unbalanced applications

**MODELS**

- ASM88 (8x8)
- ASM168 (16x8)
- ASM1616 (16x16)

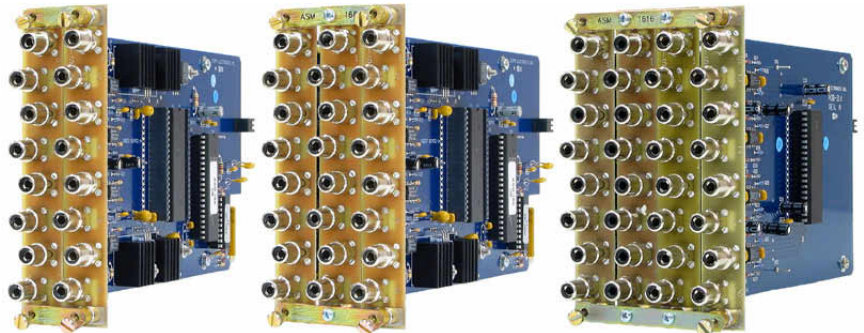

**SPECIFICATIONS**

**INPUTS**

Eight or sixteen, 15 k $\Omega$ , unbalanced  
 Level +18 dBu maximum  
 Connectors RCA

**OUTPUTS**

Eight or sixteen, 15 k $\Omega$ , unbalanced  
 Level +21 dBu max. into HiZ  
 +18 dBu into 600 $\Omega$   
 Gain Unity,  $\pm 0.2$  dB into 600 $\Omega$   
 THD 0.03% max. @ +18 dBm, worst case  
 Freq. Response  $\pm 0.2$  dB, 20 Hz to 100 kHz  
 Crosstalk 90 dB @ 1 kHz, worst case  
 70 dB @ 20 kHz, worst case  
 Hum & Noise -95 dBu, 20 kHz bandwidth  
 Connectors RCA

Prices and specifications are subject to change without notice