


DATA CONTROL TRANSLATOR - MRX2100

FEATURES

- Allows incorporation of 2100 Series routers into Sigma MRX systems
- Expands 2100 Series systems beyond 16 channel barrier
- Occupies one slot in 2100 series frame
- Allows GUI control of 2100 Series systems (SigMatrix)
- Replaces SCI2144 in 2100 Series systems

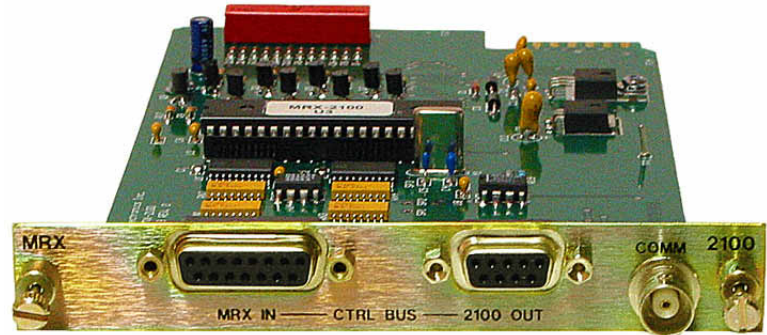

SPECIFICATIONS

INPUTS

Control Levels	Four	Control Panels	Up to 16 on Comm. Line
Communication Line	Coaxial, up to 2000 feet	Connectors	BNC for Comm. Line
External Sync Ref.	Not applicable - synced to ADX system		9 Pin "D" for control bus (to 2100)
			15 Pin "D" for control bus (from ADX)

Prices and specifications are subject to change without notice